PE-1 SERIES - 1/125 HP

APPLICATIONS

Small submersible epoxy encapsulated pump for commercial, industrial and home use. Applications include statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated.

PE-1

FEATURES

- Epoxy encapsulated motor
- 7-foot maximum lift
- Screened inlet
- 1/4-inch MNPT discharge (accepts 1/2-inch I.D. tubing)
- Impedance protected motor
- For submersible use only

1 ONE YEAR WARRANTY

SERIES SPECIFICATIONS

Item No.	Model	Discharge	Listing(s)	HP	Volts	Hz	Amps	Watts	Gallons per hour (Liters per hour) @ Height			Shut-Off	PSI	Cord	Weight lbs (Kg)
									1′	3′	5′				
518200	PE-1	1/4″ MNPT	UL/CSA	1/125	115	60	0.6	36	170 (644)	140 (530)	100 (379)	7′ (2.1 m)	3.0	6′ (1.8 m)	3 (1.36 Kg)

PE-1 SERIES - 1/125 HP

ENGINEERING DATA

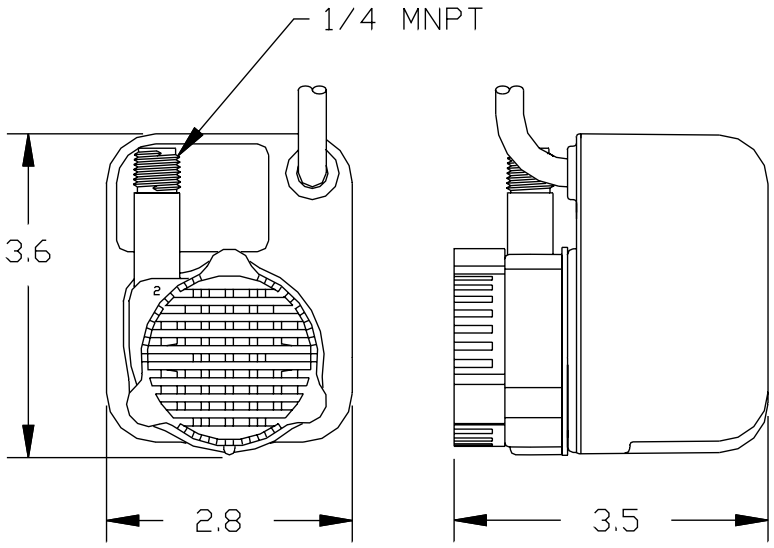

PERFORMANCE DATA

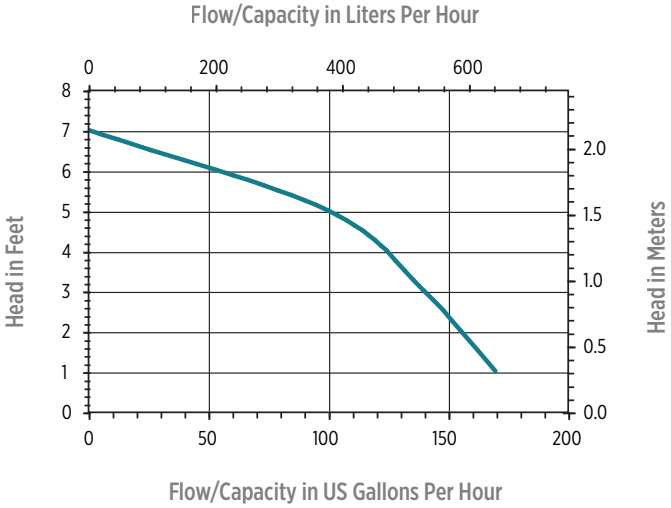

REPLACEMENT PARTS

Volute	101375 (118340, PE-1H)
Impeller	118441
Screen	118901
Gasket	101604